


INSTRUCTIONS

WEAVER 1100/870 SCOPE/MOUNT SYSTEM

INSTRUCTIONS FOR INSTALLING 1100/870 ON A MODEL 1100 OR 870 REMINGTON SHOTGUN IN 12, 16 AND 20 GA. (EXCEPT FOR 20 GA. LIGHTWEIGHT).

- 1—There are two trigger plate pins that hold the trigger assembly in place. With left side of the shotgun down, ejection port up, use 1100/870 bolts to drive out and replace the two trigger plate pins. Be sure to use the large bolt to replace the large pin and the small bolt to replace the small pin. Pins are not hard to move. Light tapping on head of bolt should drive the pin out.
- 2—Place 1100/870 bracket on left side of the receiver, thread the two bolts into the bracket and tighten. Use a medium size screw driver, and be sure that the two bolts are tight.
- 3—Sight-in and your 1100/870 is ready to use.

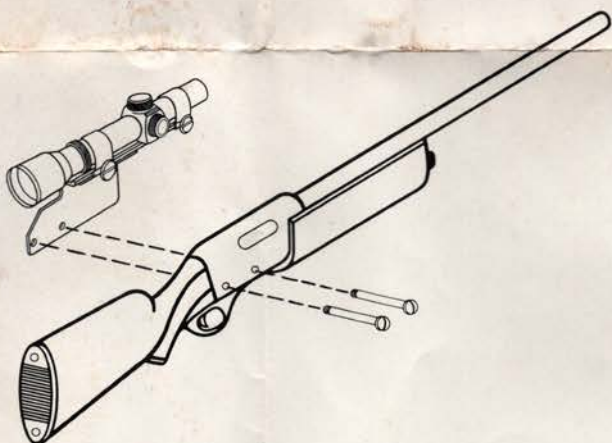

SIGHTING-IN THE 1100/870 FOR SHOTGUNS

1—How to align 1100/870 by using factory installed sights.

Place the shotgun in a vise or some fixed position with the sights precisely lined up on a target about 20 yards distant. Remove the turret caps and make any adjustments necessary in windage and elevation to line up the scope with the target. Replace the turret caps.

2—Test firing. Target should be placed against a soft dirt bank or other safe position.

Test fire the 1100/870 at one of the following distances. It is easier to determine the center of a shotgun pattern at short range.

On Full Choke guns test fire at	20 yards
On Modified Choke	15 yards
On Improved Cylinder	10 yards

Use a bench rest or other steady position. Align the reticle with the target and fire. Make any adjustments necessary in windage and elevation to bring the center of pattern onto the target.

Each click of the windage and elevation screws will change the center of your pattern as shown below:

	25 yards	50 yards
1100/870 per click	$\frac{1}{8}$ "	$\frac{1}{4}$ "