


WEAVER-DETACHABLE MOUNTS*

SPLIT RING FOR $\frac{3}{4}$ ", 1" AND 1.023" (26mm.) DIAMETER SCOPES


Solid Ring only for $\frac{7}{8}$ " Diameter Scopes

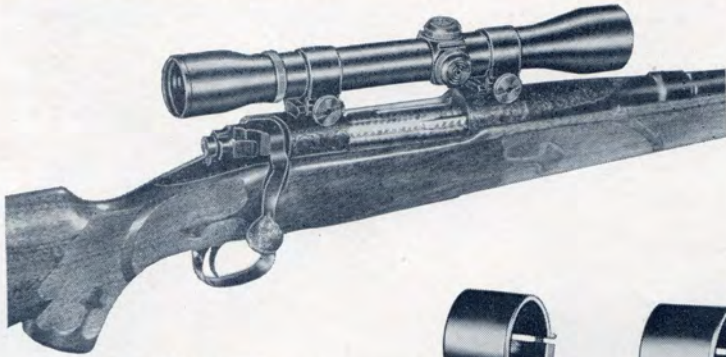

*Detachable Top Mount
(Shown with Weaver
K4 Scope)*



*Detachable Side Mount
(Shown with Weaver
J2.5 Scope)*

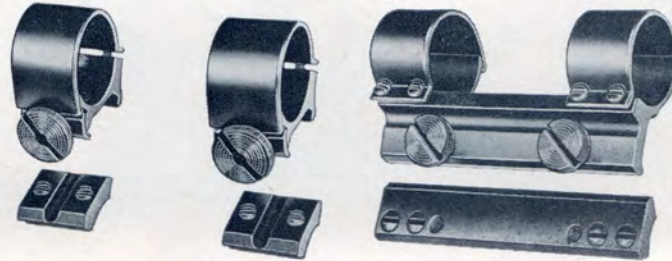

Weaver-Detachable Mounts have a new type of split ring. There are no protruding lugs for clamp screws, they are as smooth and neat in outline as solid rings.

Weaver-Detachable Mounts give the shooter a choice of either top or side mounts allowing quick and easy scope removal. When they are clamped in position the mount, scope, and rifle become one rigid unit. In a mount, dependability is the prime requirement; performance can be no more reliable than either the mount or the scope. Dependability of Weaver-Detachable Mounts has been proved by severest use in the field by thousands of shooters the world over.

An entirely new locating and holding principle is used in both the Weaver-Detachable Side and Top Mounts. V locating surfaces combined with an angular wedging surface bind the V's of the base and upper parts together to form a solid unit. V locating surfaces are the most accurate known in mechanical applications and assure precision in returning the scope to the rifle. Two heavy hardened bolts take the thrust of recoil in the side mount. In the top mount, the cross bolt for clamping the ring on the base is extended

across the full width of the mount and lies half in the base and half in the ring making slippage impossible.

Weaver-Detachable Mounts, both top and side, are made with split rings in $\frac{3}{4}$ ", 1" and 1.023 (26mm.) diameters. The rings can be installed without removing the scope eyepiece, turret or any parts, the moisture and vapor seals are not broken and no optical adjustments are affected.

The scope can be removed in a few seconds leaving only the unobtrusive bases—and standby iron sights, if wanted—on the gun. Replacement is accurate and dependable.

The mounts for $\frac{3}{4}$ ", $\frac{7}{8}$ ", 1" and 1.023 (26mm.) diameter scopes are interchangeable on the bases. It is often practical to use one scope on two rifles by obtaining extra bases; or to use two scopes, perhaps a 2 $\frac{1}{2}$ X for big game and 6X for varmints on the same rifle.

(Remington 721, 722, 760, 740, Winchester 70, 88, 43, Savage 99, Mauser and Husqvarna rifles with front and rear holes in the receiver top require no drilling for Detachable Top Mounts. Savage 340 in Hornet and .222 calibers are drilled for Detachable Side or N Mounts. Weaver Detachable Mounts are made for nearly all rifles, see list on other side.)

WEAVER TIP-OFF MOUNT*



*Tip-Off Mount
(shown with
Weaver B4 Scope)*



Shows dovetail
grooves in
rifle.

The Tip-Off Mount was designed for use with Model B and other $\frac{3}{4}$ " diameter Scopes on .22 rifles having dovetail grooves cut in the receiver of the rifle. (See list of rifles on other side) The Mount tips into the dovetail receiver grooves and is clamped to the rifle by tightening the two coin slotted clamping screws. Made of steel, polished and gun blued, it mounts low on the rifle. The Tip-Off Mount is the most rigid and dependable ever developed for .22 rifles, yet clamps on instantly without the use of tools.

WEAVER TYPE N MOUNTS*

N Mounts (side bracket design for $\frac{3}{4}$ " diameter scopes) are pressed from tough alloy steel. They are attractive, well-finished, and sturdy. A low mount is usually preferred but some users like a high mount with metallic sights under the scope. N Mount is made either way and in shapes to fit various rifles.

Four widely spaced attaching screws and secure clamping of the scope assure rigidity. N Mounts are reliable yet inexpensive and have been proved by rough use on high power rifles as well as on .22's.



*Type N Mount
(Shown with Weaver
B4 Scope)*

WEAVER-DETACHABLE MOUNTS

Either Top or Side Mounts are suitable with Weaver Scopes. Usually Detachable Top Mounts are preferred for longer scopes, particularly K6, K8 and K10.

Top and Side Detachable Mount Bases and N Mounts for each gun are shown in the list. The Tip-Off Mount is used only on .22 rifles having factory cut dovetails.

Make, Model of Rifle	Bases for Detachable Mounts		Type N Mount	Type N Mounts	
	Top Mount			Scope Position	
	Rear	Front		Low	High
ENFIELD receiver cut down like					
Remington 30	11	11	1	N1	N4
Winchester 70	37	11			
Remington 721	36	11			
H & R 65, 165, 150, 151 (Auto)	18	18	2	N2	N3
765, 852	17	21	2	N2	N3
865	17	21			
264, 265, 365, 250, 251, 450, 550	18	16	2	N2	N3
JAPANESE 6.5mm., 7.7mm.*	25	57	1	N1	N4
KRAG (If central mounting interferes with ejection, offset to left.)			2	N2	N3
MARLIN 36, 336	28	24		N5	N5
322	39	21			
39A round barrel	29	16	2	N2	N3
39 octagon barrel (attach N Mount to side of barrel)	28	31			N5
A1, 50	15	15	2	N2	N3
88, 89	18	18	2	N2	N3
80, 81	12	21	2	N2	N3
F. N., HUSQVARNA, HIGGINS 50, MAUSER with receiver ring about 1.410" dia.* Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	26	20A	5		
HVA HUSQVARNA MAUSER with receiver ring about 1.300" dia.*	55	46	1	N1	N4
ZB 8mm., 7mm., 6.5mm.* with round receiver					
MONTGOMERY - WARD 46, 41, 45, 36, 390A, 479A. Also late models 47, 48, 495A, 491A, 496A, with 3/4" dia. barrels	12	13	2	N2	N3
Early models 47, 48, 495A, 491A, 496A with 13/16" dia. barrels	12	16	2	N2	N3
488A, 489A (Auto)	15	16	2	N2	N3
80, 81 Slide action (Detachable Side Mount not suitable for B Scopes on this rifle.)	11	22	2	N5	N5
MOSSBERG 25, 26, 42, 46M. Also late models 142, 45, 46, 46A, 46B, 146 with 3/4" dia. barrels	12	13	2	N2	N3
43, 44, 144, 46BT, 35. Also early models 45, 46, 46A, 46B with 13/16" dia. barrels	12	16	2	N2	N3
40	16	21	2	N2	N3
50, 51, 151, 152	15	15	2	N2	N3
REMINGTON 720	36	11	1	N1	N4
721 (requires no drilling)	36	35	1	N1	N4
722 (requires no drilling)	36	40A	1	N1	N4
740 (requires no drilling)				N5	
760 (requires no drilling)		56		N5	
30	11	11	1	N1	N4
14, 141	20A	27		N5	N5
8, 81			4		
12A, 121 with 3/4" dia. barrels } Detachable Side Mount not suitable for B Scopes on these rifles	18	13	2	N5	N5
121 with 13/16" dia. barrels	18	17	2	N5	N5
12C octagon barrel	18	31		N5	N5
24 } Detachable Side Mount holds K4, K6, KV, K8, K10 and B Scopes	20A	21	2	N5	N5
241 } too far forward on 24 and 241	20A	13	2	N5	N5
25	18	21	2	N5	N5
37	33	34			N3
510, 511, 512, 521T, 34*, 341* Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	16	13	2	N2	N3
513S, 513T. Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	16	17	2	N2	N3
514	43	44			
550	16	21	2	N2	N3
572	12	12	2	N2	N3
33*	19	13	2	N2	N3
33*	17	13	2	N2	N3
41*	17	17	2	N2	N3
SAKO Short Action	39	23			
SAVAGE 99 (Those with front and rear holes in receiver top require no drilling for Top Mount)	14	19			
40, 45	11	11	2	N2	N3
20*			1	N1	N4
3 (for K and J Scopes)	16	21	2	N2	N3
3 (for B Scopes)			2	N2	N3
4, 5	12	13	2	N2	N3
6, 7	12	12	2	N2	N3
19, 23	15	16	2	N2	N3
219	12	30	2	N2	N3
29 round barrel (Detachable Side Mount not suitable for B Scopes on this rifle)	11	22	2	N5	N5
29, 25 octagon barrel	19	31		N5	N5
340, 342 (Hornet, .222 drilled)			1	N1	N4
SEARS-ROEBUCK					
101.20	16	13	2	N2	N3
101.23, 101.13	12	13	2	N2	N3
101.16, 101.19, 101.22	12	12	2	N2	N3
36*, 103-2*, 103.13, 103.16	12	21	2	N2	N3
103.4	15	15	2	N2	N3

Make, Model of Rifle	Bases for Detachable Mounts		Type N Mount	Type N Mounts	
	Top Mount			Scope Position	
	Rear	Front		Low	High
SPRINGFIELD '03*. Regular bases for eyepieces up to 1.355" dia.	11	25	1	N1	N4
Slightly higher bases for eyepieces up to 1.445" dia.	54	55			
'03-A3*			1	N1	N4
STEVENS 26	22	22	2	N2	N3
27 octagon (attach N5 Mount to side of barrel)	31	31			N5
53 (for K and J Scopes)	16	21	2	N2	N3
53 (for B Scopes)			2	N2	N3
56, 66	12	13	2	N2	N3
57, 76, 762	12	12	2	N2	N3
416	18	17	2	N2	N3
417	15	15	2	N2	N3
417 1/2	12	12	2	N2	N3
418, 418 1/2	16	16	2	N2	N3
325, 322			1	N1	N4
STEVENS-SPRINGFIELD 15	16	13	2	N2	N3
83 (for K and J Scopes)	16	21	2	N2	N3
83 (for B Scopes)			2	N2	N3
84, 86	12	13	2	N2	N3
85, 87, 872	12	12	2	N2	N3
WINCHESTER 54*, early Model 70 Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	38	35	1	N1	N4
70 new models (require no drilling)	48	46			
.375, .300 Magnum callbers Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	41	35	1	N1	N4
Model 70 in other callbers Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	49	46			
Model 70 in other callbers Regular bases for eyepieces up to 1.355" dia. Slightly higher bases for eyepieces up to 1.445" dia.	37	35	1	N1	N4
07, 05, 10	20A	17		N5	N5
88, use one-piece base	53				
Lever action, except Model 88			3		
43 Factory drilled holes in receiver give very close spacing of top mounts. Wider spacing is recommended with rear mount using factory drilled holes and front mount well forward on the barrel. In this case use bases	18	21			
If close spacing of top mounts is satisfactory front and rear factory drilled holes in receiver can be used. Then use bases	18	18			
03, 63 (for K and J Scopes)	19	22	2	N2	N3
03, 63 (for B Scopes)	19	22		N5	
06, 62, 62A	32	32			N3
90 octagon barrel (attach N5 Mount to right side of barrel)	32	32			N5
61 round barrel (Detachable Side Mount not suitable for B Scopes on this rifle)	19	13	2	N5	N5
61 octagon barrel	25	32		N5	N5
60*, 67*, 68*	21	21		N2	N3
57, 69	12	13	2	N2	N3
69A, 72, 47	12	17	2	N2	N3
74	12	12	2	N2	N3
77	15	32	2		
75 Sporter	15	30	2	N2	N3
75 Target	15	16	2	N2	N3
52* all models. Late 52 Sporters with holes in receiver top require no drilling	25	57	2		N3
ZB 22	28	24	2	N2	N3
ZB Hornet, .218 Bee	39	24			
SHOTGUNS					
Pump shotguns except Win. 42			8		
Winchester 42			2		
Auto shotguns except Remington 11-48, Sportsman 48, Winchester 50			7		
Remington Auto 11-48, Sportsman 48, Winchester 50			8		

Top Mounts with No. 50 (long, one-piece) Base can be used on some doubles and singles with ribs of sufficient thickness for base screws.

Note: Attaching mounts on aluminum receivers is not recommended.

Rifles marked * (and older guns in some other models) require altering of bolt handle except with K and J Scopes when the Scope is mounted forward or when N Mount is used in high position.

TIP-OFF MOUNT

For .22 rifles with 3/8" dovetail receiver grooves, including:

- 1954 Savage Models 4, 5 and 6.
- 1954 Stevens Models 84, 85, 86 and 87.
- 1955 Winchester Models 61, 69, 72, 74, 75S, 77.
- Mossberg Models 142, 142M, 144, 146B, 151K, 151M, 152, 152M.
- 1954 Marlin Models 80C, 80DL, 81C, 81DL, 88C, 88DL and 89C.
- 1954 Remington Models 511, 512, 550, 513S, 572.

NOTE:—Model B Scopes (like others designed primarily for .22 rifles) have short eye relief and should not be used on high power rifles.

Weaver-Detachable Mount (Top or Side, 3/4", 7/8", 1", or 1.023) complete.....\$9.75
 Weaver-Detachable Top Mount Scope Rings, pair (Less Bases)..... 9.00
 Weaver-Detachable Side Mount Scope Bracket (Less Base)..... 9.00
 Bases for Top Mount, pair..... 1.50
 Base for Side Mount..... 1.50
 N or Tip-Off Mount (for 3/4" dia. scopes)..... 2.00
 Drill and Tap for Attaching..... 1.00
 When ordering Weaver-Detachable Mounts be sure to mention the scope model so the right size rings will be furnished.

This paragraph is prompted by our experience with various mounts. Looseness or insecurity often causes unaccountable variations in bullet impact and shows the importance of complete tightening of any scope mount. The slightest movement of the scope in the mounts or the mount on the gun will cause wild and erratic shooting. Our experience has shown that four scope clamping screws and as many attaching screws are needed for reliable results on high power rifles, and all of them must be turned very tight to make the entire assembly absolutely rigid. All the screws in Weaver Scopes and Mounts are hardened, be sure they are turned as tight as possible with a well fitting screw driver having a medium large handle.